




RoHS

SPECIFICATIONS



Current Rating: 0.5A AC,DC
 Voltage Rating: 30V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 200V AC/minute
 Insulation O.D.: 0.38mm
 Applicable Wire: AWG32#
 Material: Nylon 66,UL94V-0
 Phosphor/Tin-Plated or G/F

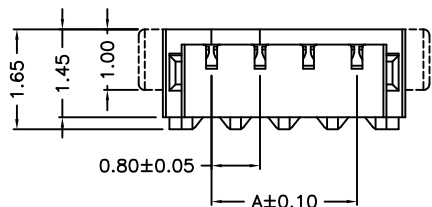

With EAR





Without EAR



A0801HS0-NP-*

None: Without EAR
 H: With EAR

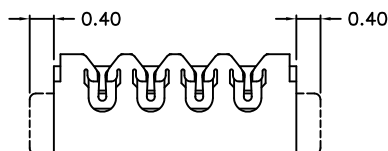

Circuits	Dimensions		Q'ty/Bag
	A	B	
2	0.80	2.40	2000Pcs
3	1.60	3.20	
4	2.40	4.00	
5	3.20	4.80	
6	4.00	5.60	
7	4.80	6.40	
8	5.60	7.20	1000Pcs
9	6.40	8.00	
10	7.20	8.80	
11	8.00	9.60	
12	8.80	10.40	
13	9.60	11.20	
14	10.40	12.00	
15	11.20	12.80	
16	12.00	13.60	
17	12.80	14.40	
18	13.60	15.20	
19	14.40	16.00	
20	15.20	16.80	
22	16.80	18.40	
24	18.40	20.00	
28	21.60	23.20	

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
 0.00±0.15
 0.000±0.10

DRAW

DESIGN
 CHECK
 APPROVE
 VERSION

邓彬

邓彬

邓彬

YL2

SCALE

1:1
 UNIT
 SIZE
 SHEET
 PROJ.

1:1

mm
 A4
 1/1



耀聯電子科技有限公司
 UNC Electronic & Technology Co., Ltd

PART NO.

A0801HS0-NP-*

DESCRIPTION

0.80mm PITCH

DRAWING NO.

I.D.C. HOUSING