

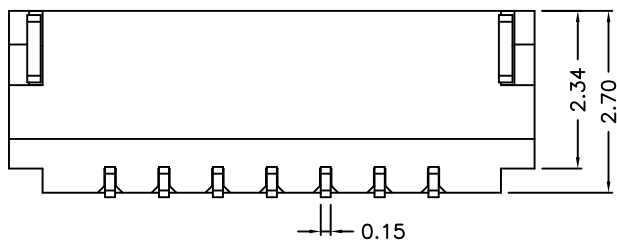

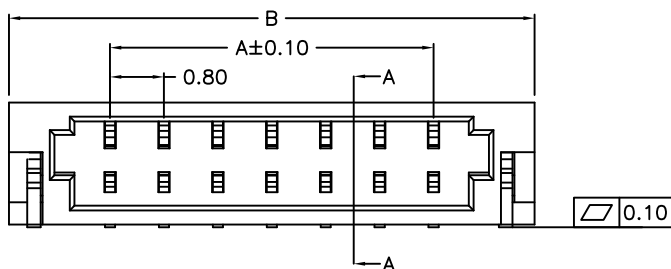



RoHS

SPECIFICATIONS

Current Rating: 0.5A AC,DC  
 Voltage Rating: 30V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 200V AC/minute  
 Material: LCP,UL94V-0  
 Phosphor/Tin-Plated or G/F

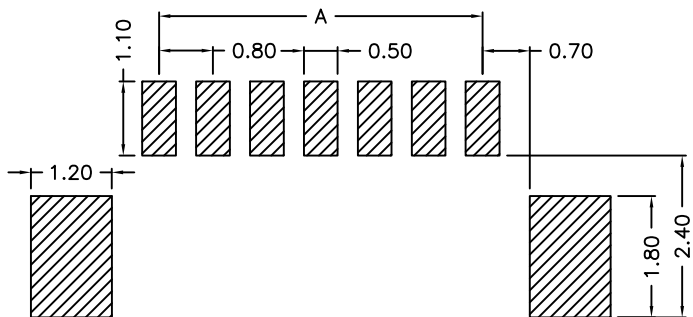

Circuits	Dimensions		Q'ty/Bag
	A	B	
2	0.80	3.80	3500Pcs
3	1.60	4.60	
4	2.40	5.40	
5	3.20	6.20	
6	4.00	7.00	
7	4.80	7.80	
8	5.60	8.60	
9	6.40	9.40	
10	7.20	10.20	
11	8.00	11.00	
12	8.80	11.80	
13	9.60	12.60	
14	10.40	13.40	
15	11.20	14.20	
16	12.00	15.00	
17	12.80	15.80	
18	13.60	16.60	
19	14.40	17.40	
20	15.20	18.20	
22	16.80	19.80	
24	18.40	21.40	

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE  
 .0±0.25  
 0.00±0.15  
 0.000±0.10

DRAW	旭德	SCALE	1:1
DESIGN	旭德	UNIT	mm
CHECK	彭春	SIZE	A4
APPROVE	彭春	SHEET	1/1
VERSION	YL2	PROJ.	☉

**UNC** 耀聯電子科技有限公司  
 UNC Electronic & Technology Co., Ltd

PART NO. A0801WRO-S-NP-\*  
 DESCRITON 0.80mm PITCH  
 DRAWING NO. I.D.C. WAFER

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn