


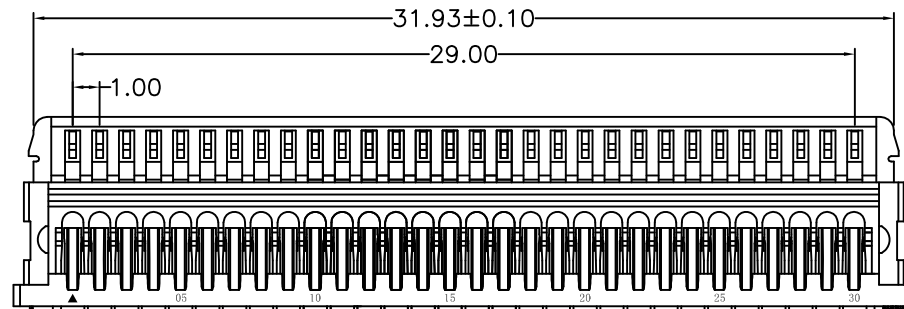
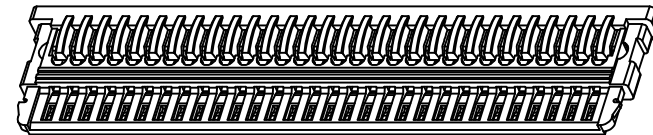
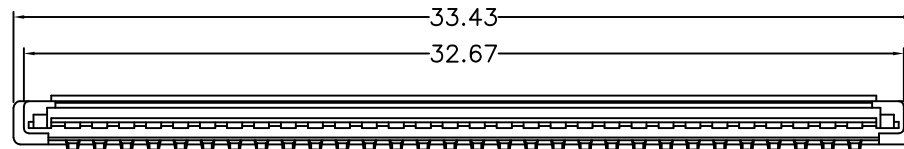


RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -40°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material:

Housing: Nylon,UL94V-0
 Shell: Stainless Steel
 Q'ty: 50/Tray

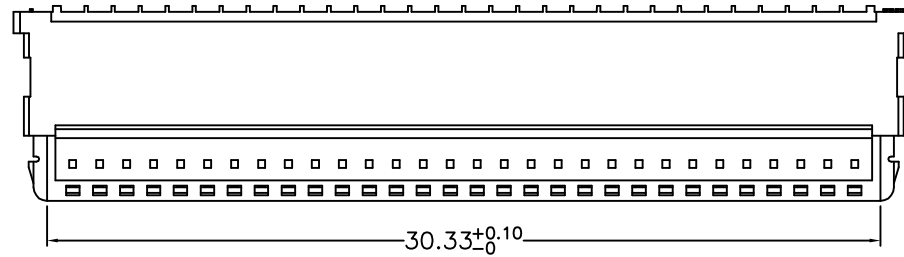

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE
△	2018-12-26	Optimized Dimensioning	旭皓	吴奇春
△	2019-03-15	Optimized Dimensioning	旭皓	吴奇春

TOLERANCE

.0±0.25
 0.00±0.15
 0.000±0.10

DRAW

DESIGN 旭皓
 CHECK 吴奇春
 APPROVE 吴奇春
 VERSION QY3

SCALE

1:1
 UNIT mm
 SIZE A4
 SHEET 1/1
 PROJ.

UNC 耀聯電子科技有限公司
 UNC Electronic & Technology Co., Ltd

PART NO. A1001HS0-30P-H
 DESCRITON FI-X1.0 30P HSG
 DRAWING NO. A1001.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn