

RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$





Contact Resistance: 10m Ω Max.

Insulation Resistance: 100M Ω Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Color: Natural(White)

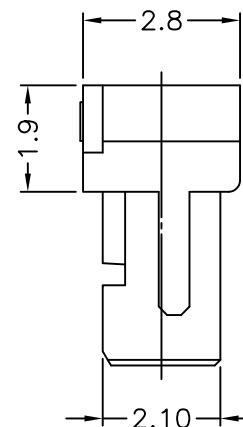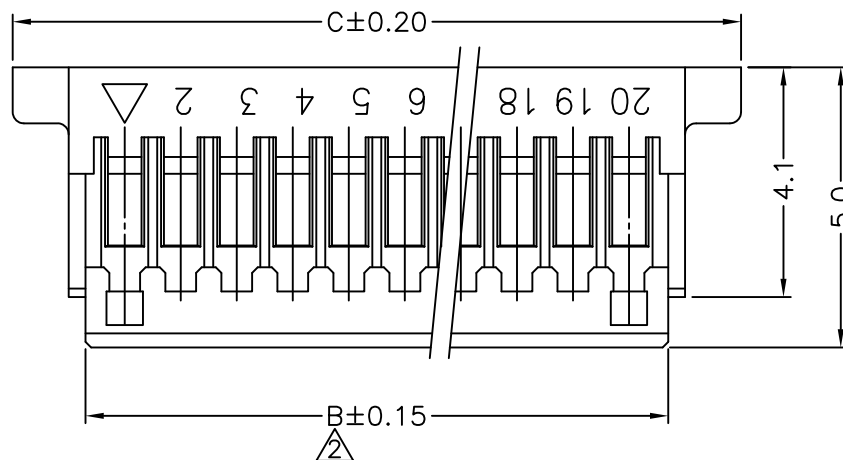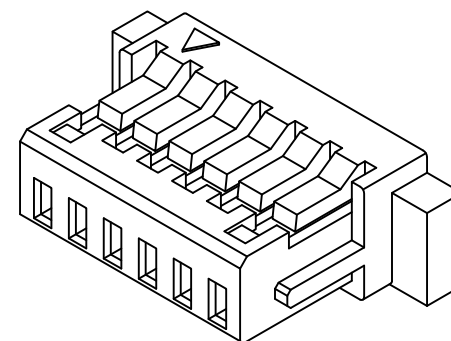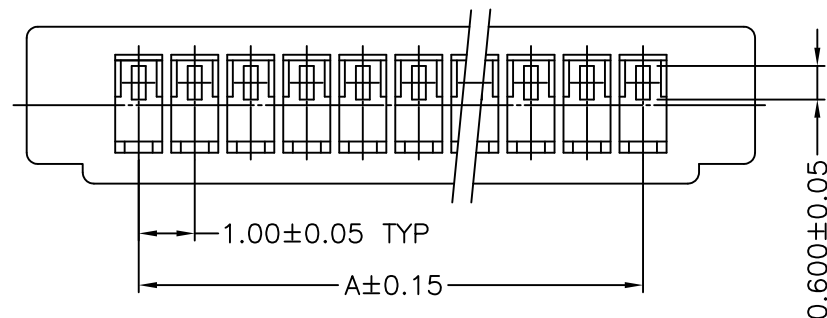

Circuits	Dimensions		
	A	B	C
2	1.00	2.35	5.00
3	2.00	3.35	6.00
4	3.00	4.35	7.00
5	4.00	5.35	8.00
6	5.00	6.35	9.00
7	6.00	7.35	10.00
8	7.00	8.35	11.00
9	8.00	9.35	12.00
10	9.00	10.35	13.00
11	10.00	11.35	14.00
12	11.00	12.35	15.00
13	12.00	13.35	16.00
14	13.00	14.35	17.00
15	14.00	15.35	18.00
16	15.00	16.35	19.00
17	16.00	17.35	20.00
18	17.00	18.35	21.00
19	18.00	19.35	22.00
20	19.00	20.35	23.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE
△	17/2/20	新模具修改尺寸	BO	CHEN

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

张永春

张永春

ZJT2

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

⌀



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1002H00-NP

DESCRITON

SH1.0 Single-row HSG

DRAWING NO.

A1002.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn