

RoHS






SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 10m Ω Max.
Insulation Resistance: 100M Ω Min.
Withstanding Voltage: 500V AC/minute
Material:

HSG: Nylon6T 94V-0

Contact: Phos.Broze, Tin-plated/Gold-Flash

Solder: Brass, Tin-plated/Gold-Flash

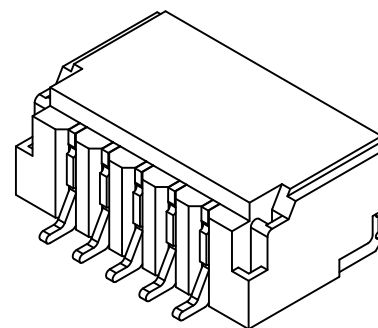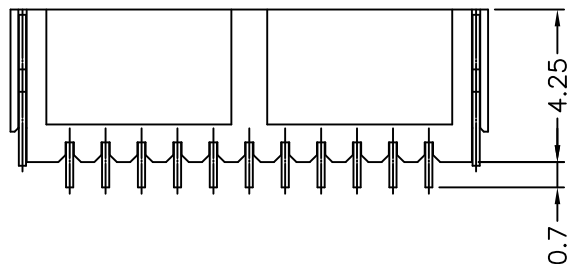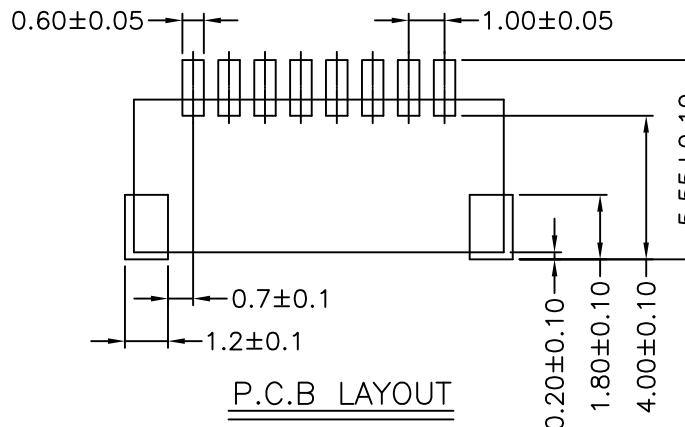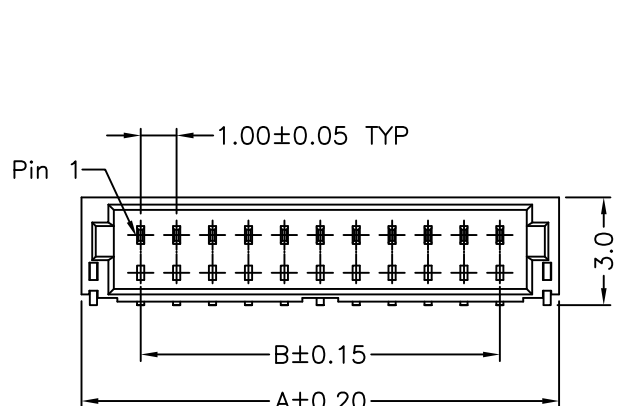

Circuits	Dimensions	
	A	B
2	4.30	1.00
3	5.30	2.00
4	6.30	3.00
5	7.30	4.00
6	8.30	5.00
7	9.30	6.00
8	10.30	7.00
9	11.30	8.00
10	12.30	9.00
11	13.30	10.00
12	14.30	11.00
13	15.30	12.00
14	16.30	13.00
15	17.30	14.00
16	18.30	15.00
17	19.30	16.00
18	20.30	17.00
19	21.30	18.00
20	22.30	19.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

张舒

张舒

ZJT1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1002WR0-S-NP

DESCRITON

SH1.0 Single-row 90°WFR

DRAWING NO.

A1002.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn