
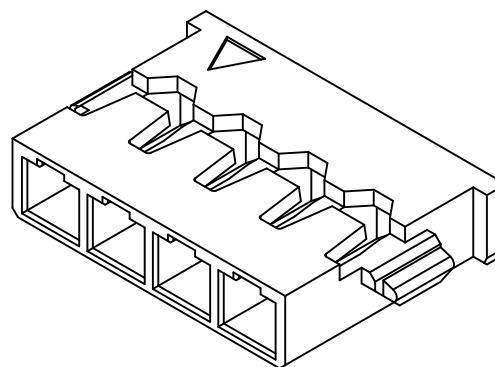
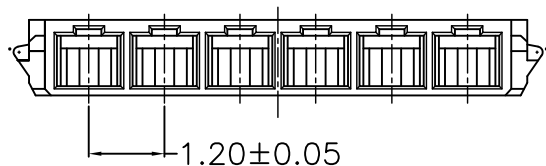
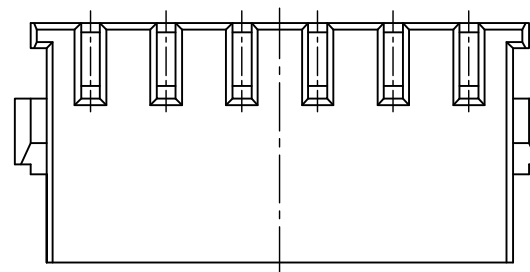

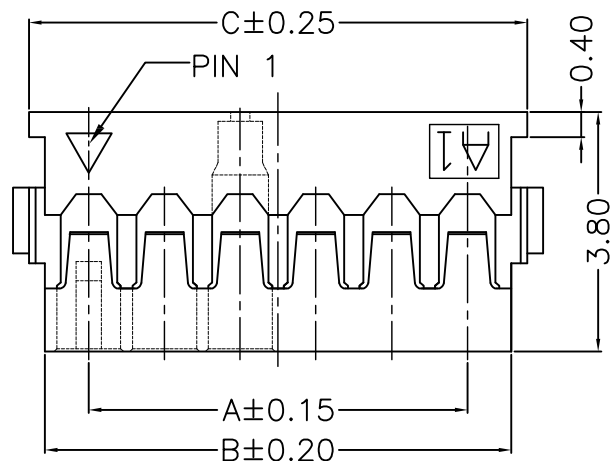


RoHS

SPECIFICATIONS

Current Rating: 1.5A AC,DC  
 Voltage Rating: 50V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon66 UL94V-0 Black  
 LCP UL94V-0 Black

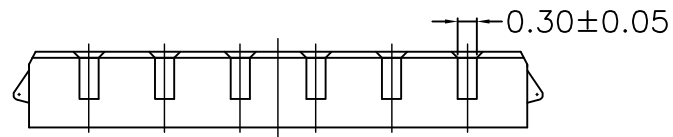

Circuits	Dimensions		
	A	B	C
2	1.20	2.60	3.10
3	2.40	3.80	4.30
4	3.60	5.00	5.50
5	4.80	6.20	6.70
6	6.00	7.40	7.90
7	7.20	8.60	9.10
8	8.40	9.80	10.30
9	9.60	11.00	11.50
10	10.80	12.20	12.70
11	12.00	13.40	13.90
12	13.20	14.60	15.10
13	14.40	15.80	16.30
14	15.60	17.00	17.50
15	16.80	18.20	18.70

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25  
 0.00±0.15  
 0.000±0.05

DRAW

DESIGN  
 CHECK  
 APPROVE  
 VERSION

旭信

旭信

张奇春

张奇春

ZJT1

SCALE

1:1  
 UNIT  
 SIZE  
 SHEET  
 PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司  
 UNC Electronic & Technology Co., Ltd

PART NO.

A1201H00-NP

DESCRITON

1.20mm PITCH

DRAWING NO.

HOUSING