

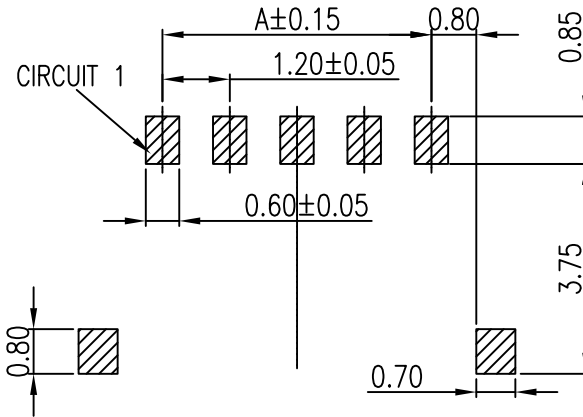
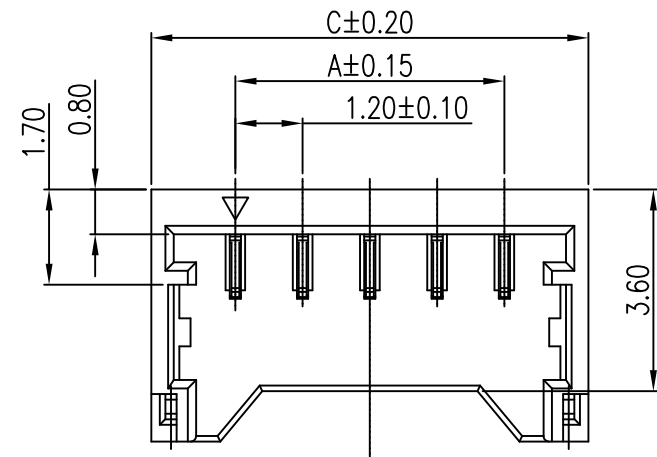


RoHS



P.C.B LAYOUT
(TOP VIEW)

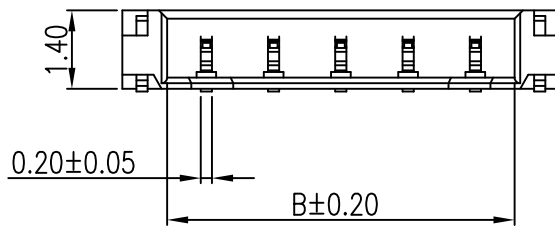

SPECIFICATIONS

Current Rating: 1.5A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold Flash
 Solder Tabs: Brass/Tin Plated
 Material: Nylon 9T,UL94V-0
 Color: Black
 Q'TY: 4,000Pcs/Reel

Circuits	Dimensions		
	A	B	C
2	1.20	2.65	4.20
3	2.40	3.85	5.40
4	3.60	5.05	6.60
5	4.80	6.25	7.80
6	6.00	7.45	9.00
7	7.20	8.65	10.20
10	10.80	12.25	13.80

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
 0.00±0.15
 0.000±0.10

DRAW

DESIGN
 CHECK
 APPROVE
 VERSION

邓伟

邓伟

邓伟

SY1

SCALE

1:1
 UNIT
 SIZE
 SHEET
 PROJ.

1:1

mm
 A4
 1/1



耀聯電子科技有限公司
 UNC Electronic & Technology Co., Ltd

PART NO.

A1201WR0-S-NP

DESCRITON

1.20mm PITCH

DRAWING NO.

90°WAFER SMT-TYPE