



1 2 3 4 5 6 7 8 9 10

SPECIFICATIONS




Current Rating: 2A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon66 UL94V-0 Natrue

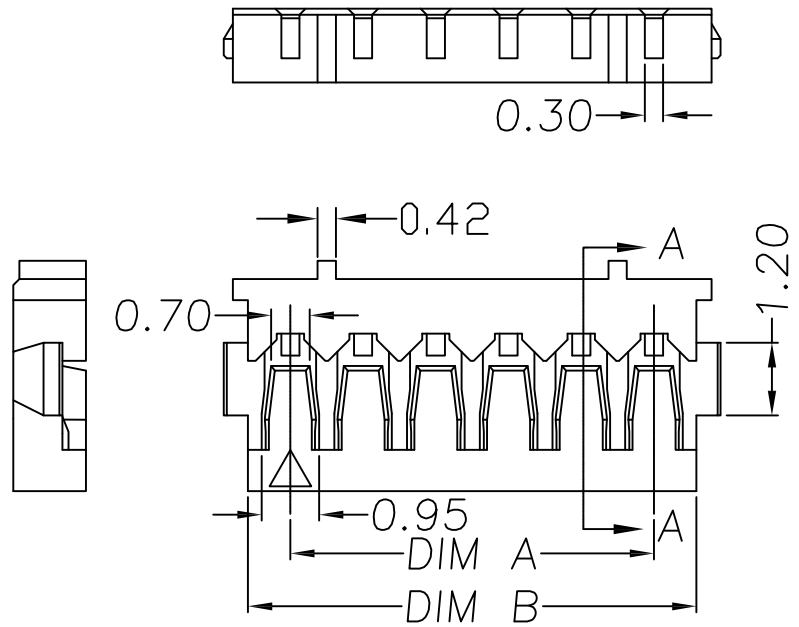

4P/15P

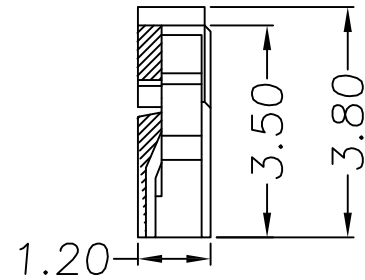

SECTION A-A

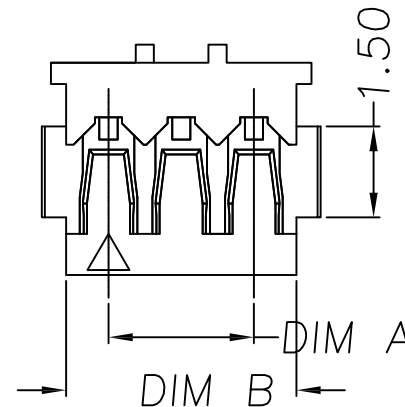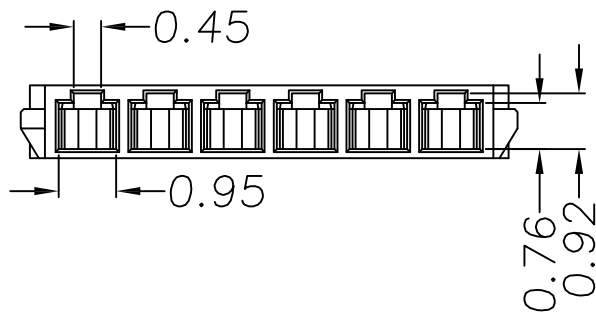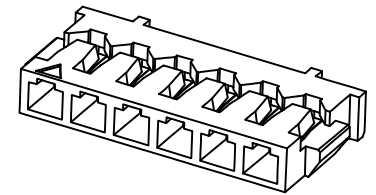

2P/3P

Circuits	Dimensions	
	A	B
1	-	1.40
2	1.20	2.60
3	2.40	3.80
4	3.60	5.00
5	4.80	6.20
6	6.00	7.40
7	7.20	8.60
8	8.40	9.80
9	9.60	11.00
10	10.80	12.20
11	12.00	13.40
12	13.20	14.60
13	14.40	15.80
14	15.60	17.00
15	16.80	18.20

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
 0.00±0.15
 0.000±0.05

DRAW

DESIGN
 CHECK
 APPROVE
 VERSION

旭德
 旭德
 彭春
 彭春
 LY1

SCALE

1:1
 UNIT mm
 SIZE A4
 SHEET 1/1
 PROJ.



耀聯電子科技有限公司
 UNC Electronic & Technology Co., Ltd

PART NO.

A1202H00-NP

DESCRITON

1.20mm PITCH

DRAWING NO.

HOUSING

TEL:0769-87299998 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn

1 2 3 4 5 6 7 8 9 10