
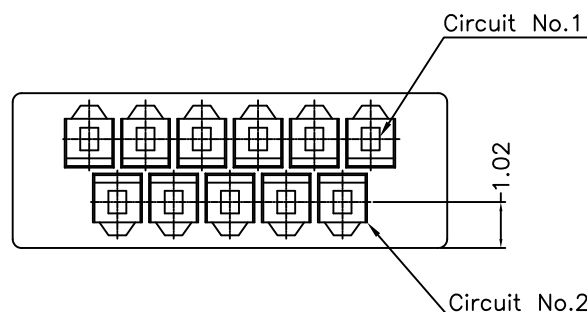
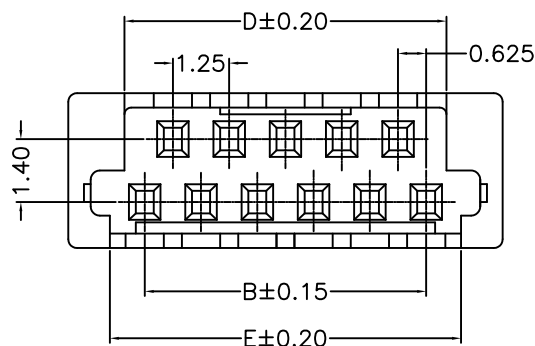
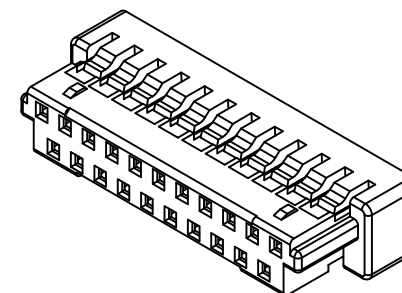
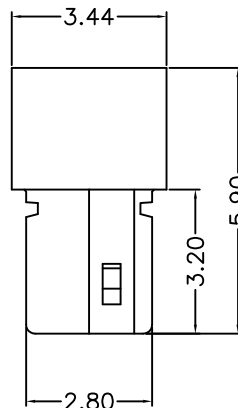


RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 200V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage:500V AC/minute
Material: Nylon 66,UL94V-0
Color: Black

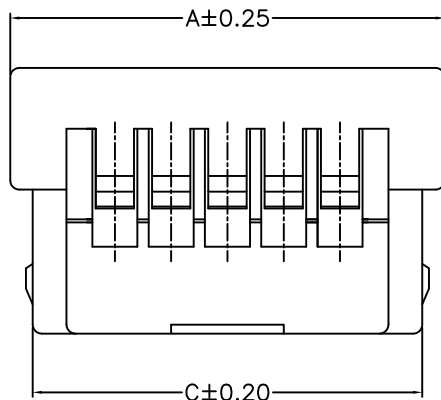

Circuits	Dimensions				
	A	B	C	D	E
5	6.00	2.50	3.40	3.40	4.05
7	7.25	3.75	4.65	4.65	5.30
9	8.50	5.00	5.90	5.90	6.55
11	9.75	6.25	7.15	7.15	7.80
13	6.25	7.50	8.70	8.40	9.05
15	7.50	8.75	9.65	9.65	10.30
17	8.75	10.00	10.90	10.90	11.55
19	10.00	11.25	12.15	12.15	12.80
21	11.25	12.50	13.40	13.40	14.05
31	12.50	18.75	19.65	19.65	20.30
41	13.75	25.00	28.90	25.90	26.55

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
0.00±0.15
0.000±0.05

DRAW

DESIGN
CHECK
APPROVE
VERSION

旭德

旭德

张舒春

张舒春

ZJT1

SCALE

UNIT
SIZE
SHEET
PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

A1256H00-NP

DESCRITON

FIS1.25 Dual-Row HSG

DRAWING NO.

A1256.dwg

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn