


RoHS

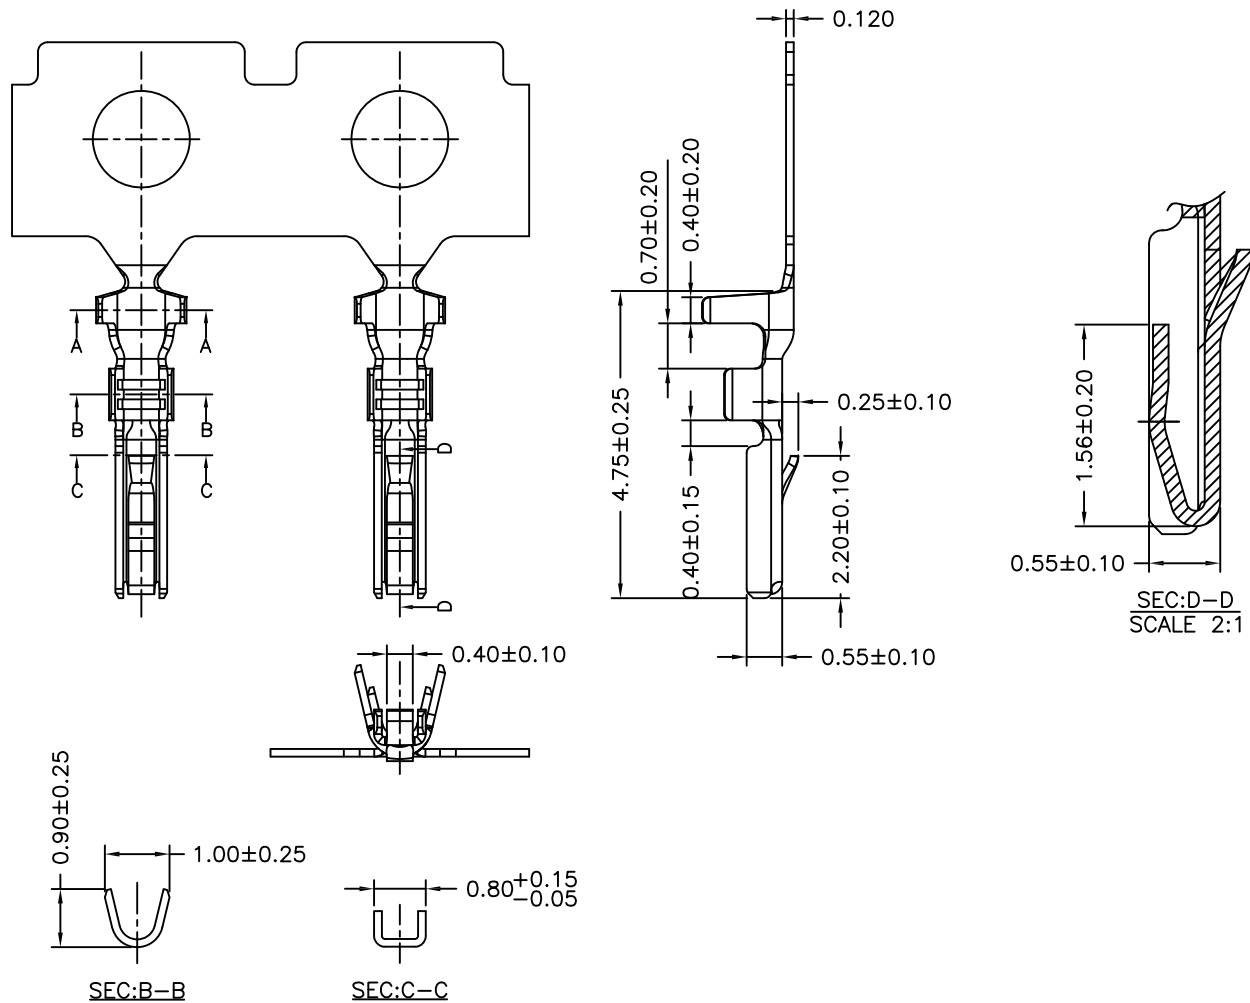

- Plating Spec (0\*)
- 00--1μ"
  - 0A--3μ"
  - 0B--4μ"
  - 0C--5μ"
  - 0D--15μ"
  - 0E--30μ"
  - 0F--50μ"
  - 0G--10μ"
  - 0H--2μ"
  - 0I--20μ"
  - 0J--25μ"

NOTE:  
 A. Gold Plated Area.  
 B. Tested Area For Coating Thickness.  
 C. Point of Measurement For Coating Thickness.

Part No.	Wire Range	Insulation O.D.	Material	Finish	Q'ty/Reel
A1259TOP-0*	AWG 28#~30#	0.80mm(Max)	Phos.Bronze	Gold-Flash	15,000
A1259TOP-2e	AWG 28#~30#	0.80mm(Max)	Phos.Bronze	Tin-Plated	15,000

Note: e-Stamping before Tin-plated or Gold-flash

REVISION RECORD					TOLERANCE	DRAW	SCALE	1:1	耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
REV.	DATE	DESCRIPTION	CHANGE	APPROVE						
					.0±0.25	DESIGN	UNIT	mm	PART NO.	A1259TOP-xx
					0.00±0.15	CHECK	SIZE	A4	DESCRITON	1.25 Pitch TERMINAL
					0.000±0.08	APPROVE	SHEET	1/1	DRAWING NO.	A1259.dwg
						VERSION	PROJ.			