
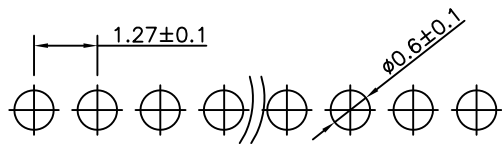
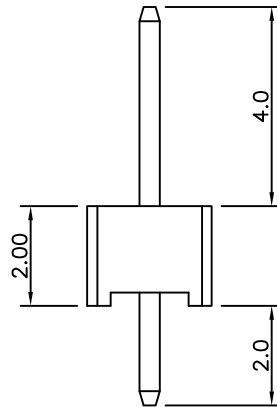
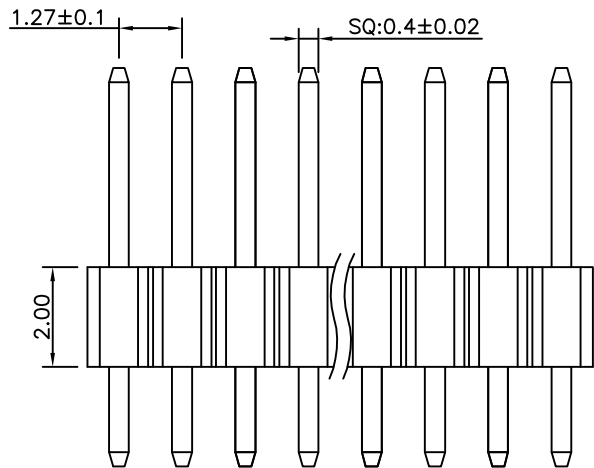


RoHS

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material:
 HSG:Nylon6T UL94V-0
 PIN:Brass/Gold-Flash

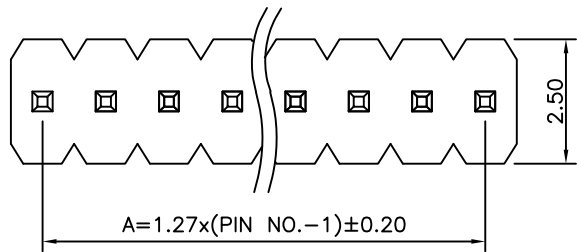

RECOMMENDED P.B.C LAYOUT

Circuits	Dimensions	
	A	B
1X02	1.27	2.54
1X03	2.54	3.81
1X04	3.81	5.08
1X05	5.08	6.35
1X06	6.35	7.62
1X07	7.62	8.89
⋮	⋮	⋮
⋮	⋮	⋮
⋮	⋮	⋮
1X50	62.23	63.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
 0.00±0.15
 0.000±0.10

DRAW

DESIGN
 CHECK
 APPROVE
 VERSION

旭德
 旭德
 彭春
 彭春
 HX1

SCALE

1:1
 UNIT
 SIZE
 SHEET
 PROJ.

mm
 A4
 1/1



耀聯電子科技有限公司
 UNC Electronic & Technology Co., Ltd

PART NO.
 DESCRITON
 DRAWING NO.

A1271WV0-1XNP
 PITCH1.27*H2.0 1XNP
 PIN HEADER