

1 2 3 4 5 6 7 8 9 10

RoHS

The drawing includes the following views and dimensions:

- Top View:** Shows two circular mounting holes. The distance between the centers of the holes is 0.85. The width of the base is 1.10. The height of the base is 1.55.
- Side View:** Shows the profile of the terminal. The total height is 3.8±0.3. The width of the base is 1.3. The width of the top flange is 0.6. The width of the side flange is 1.5.
- Cross-section A-A:** Shows the internal structure of the terminal. The width of the top flange is 1.7±0.3. The height of the top flange is 1.5±0.3.
- Cross-section B-B:** Shows the internal structure of the terminal. The width of the top flange is 1.3. The height of the top flange is 1.1.




Part No.	Wire Range	Insulation O.D.	Material	Finish	Q'ty/Reel
A1501TOP-2	AWG 26#~32#	1.10mm(Max)	Phos.Bronze	Tin-Plated	15,000

Note: e-Stamping before Tin-plated or Gold-flash


REVISION RECORD					TOLERANCE	DRAW	DATE	SCALE	1:1	UNC® 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd
REV.	DATE	DESCRIPTION	CHANGE	APPROVE						
					.0±0.25	DESIGN				
					0.00±0.15	CHECK				
					0.000±0.10	APPROVE				
						VERSION				

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn

1 2 3 4 5 6 7 8 9 10

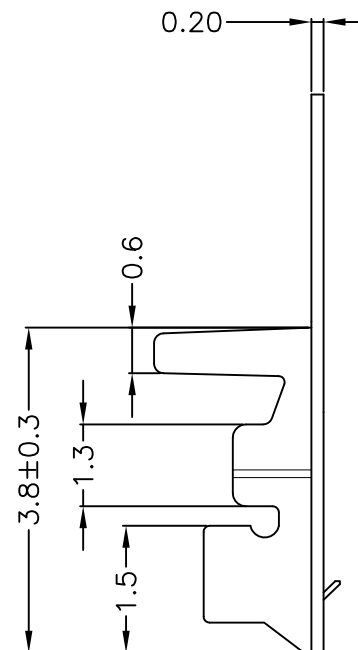

SEC:A-A



SEC:B-B

Note: e-Stamping before Tin-plated or Gold-flash

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:<http://www.uniconn.cn>