

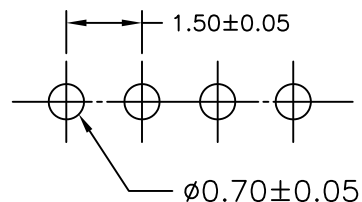
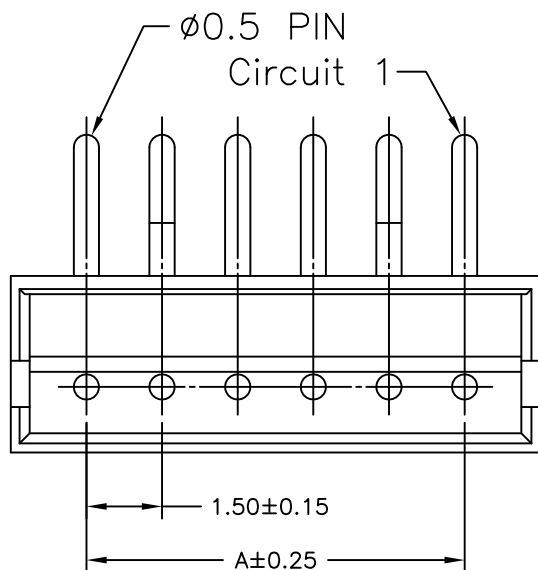


RoHS

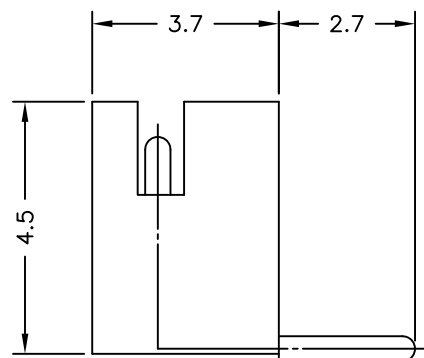


P.C.B. LAYOUT

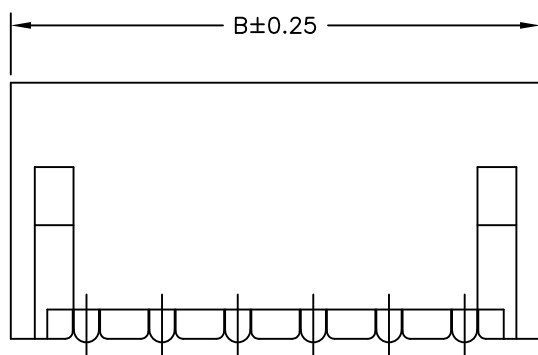

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 20m Ω Max.
Insulation Resistance: 500M Ω Min.
Withstanding Voltage: 500V AC/minute
Material: PIN: Brass/Tin-plated
HSG: Nylon 66,UL94V-0
Color: Natural(White)

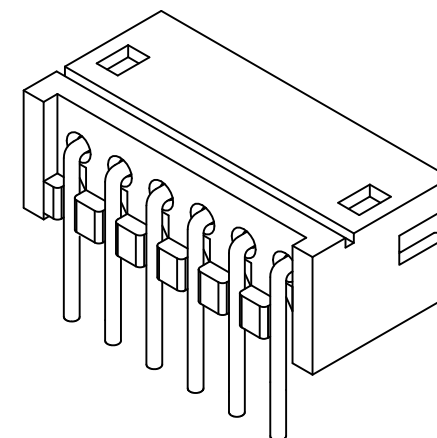

Circuits	Dimensions	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

$.0 \pm 0.25$
 0.00 ± 0.15
 0.000 ± 0.10

DRAW

DESIGN
CHECK
APPROVE
VERSION

JD1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

DESCRITON

DRAWING NO.

A1501WR0-NP

ZH1.5 90° Wafer

A1501.dwg

TEL:0769-87299998 FAX:0769-87299968

E-Mail:uniconn@163.com WEB:http://www.uniconn.cn