

RoHS

Circuit 1

1.50±0.15

A±0.25

B±0.4

ø0.5 PIN

1.50±0.05

ø0.70±0.05

P.C.B LAYOUT

3.7

4.5

2.70±0.30

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PIN: Brass/Tin-plated


HSG: Nylon 66,UL94V-0

Color: Natural(White)

Circuits	Dimensions	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

REVISION RECORD					TOLERANCE	DRAW	SCALE	1:1	UNC® 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
REV.	DATE	DESCRIPTION	CHANGE	APPROVE						
					.0±0.25	DESIGN	UNIT	mm	PART NO.	A1501WV0-NP
					0.00±0.15	CHECK	SIZE	A4	DESCRITON	ZH1.5 180° Wafer
					0.000±0.10	APPROVE	SHEET	1/1	DRAWING NO.	A1501.dwg
						VERSION	PROJ.			
					TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn					

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: PIN: Brass/Tin-plated
HSG: Nylon 66,UL94V-0
Color: Natural(White)

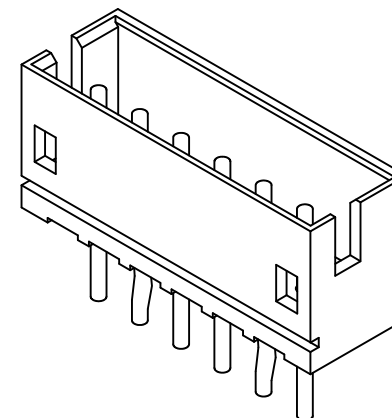

Circuits	Dimensions	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

REVISION RECORD					TOLERANCE	DRAW	比例	SCALE	1:1	 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
REV.	DATE	DESCRIPTION	CHANGE	APPROVE		DESIGN	比例	UNIT	mm		
					.0±0.25	CHECK	吳奇春	SIZE	A4	PART NO.	A1501WV0-NP
					0.00±0.15	APPROVE	吳奇春	SHEET	1/1	DESCRITON	ZH1.5 180° Wafer
					0.000±0.10	VERSION	JD1	PROJ.		DRAWING NO.	A1501.dwg
					TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn						