

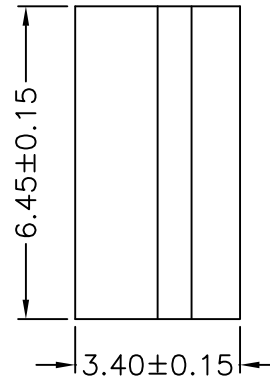
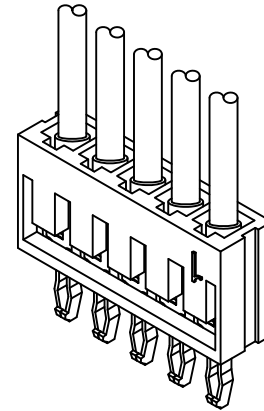
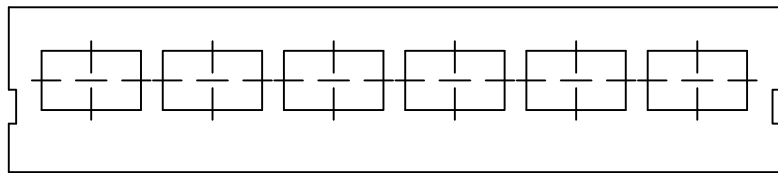
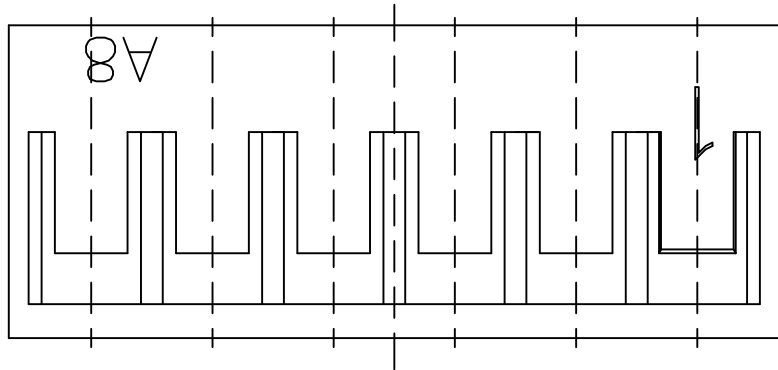


RoHS

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

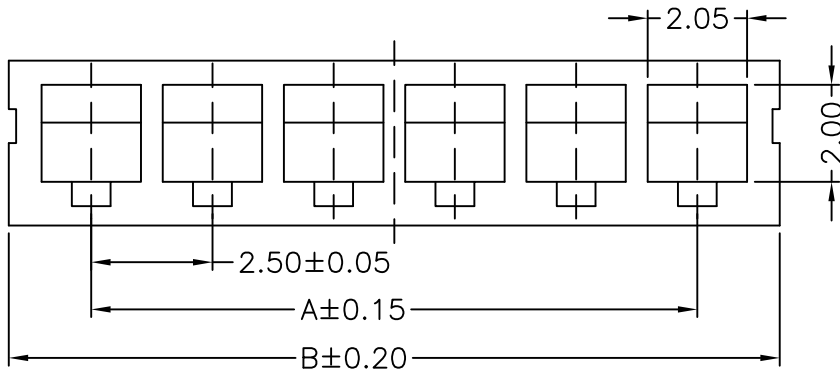

P.C.B LAYOUT

Circuits	Dimensions	
	A	B
2	2.50	5.90
3	5.00	8.40
4	7.50	10.90
5	10.00	13.40
6	12.50	15.90
7	15.00	18.40
8	17.50	20.90
9	20.00	23.40
10	22.50	25.90
11	25.00	28.40
12	27.50	30.90
13	30.00	33.40
14	32.50	35.90
15	35.00	38.40
16	37.50	40.90
17	40.00	43.40
18	42.50	45.90
19	45.00	48.40
20	47.50	50.90

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.25
 0.00±0.15
 0.000±0.05

DRAW

DESIGN

CHECK

APPROVE

VERSION

旭德

旭德

张春

张春

ZJT1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
 UNC Electronic & Technology Co., Ltd

PART NO.

DESCRITON

DRAWING NO.

B2513H00-NP

SCN2.0 180°Housing

B2513.dwg