

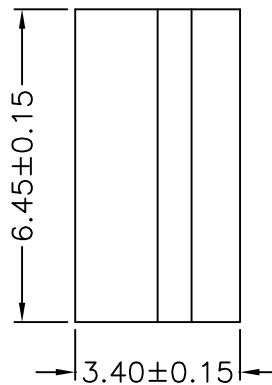
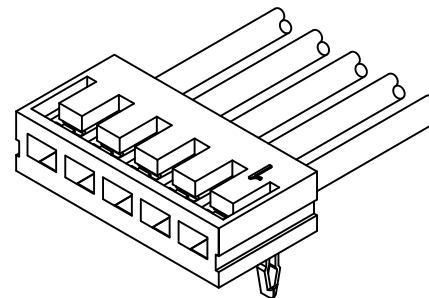
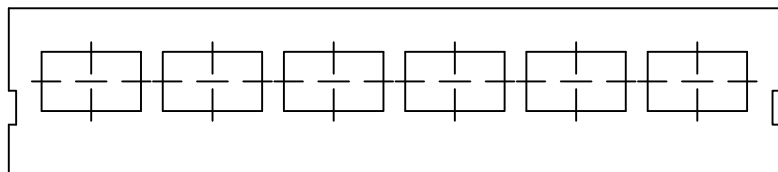
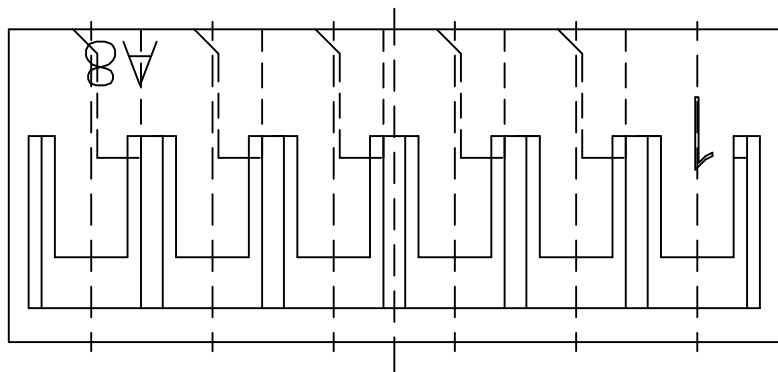


RoHS

**SPECIFICATIONS**

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 800V AC/minute  
 Material: Nylon 66,UL94V-0  
 Color: Natural(White)

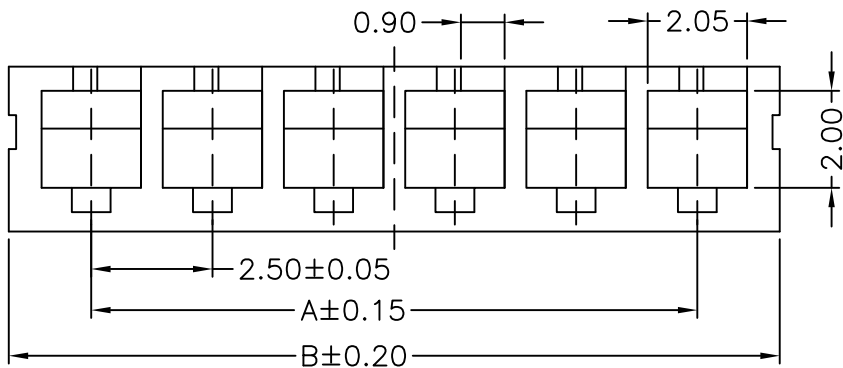

P.C.B LAYOUT

Circuits	Dimensions	
	A	B
2	2.50	5.90
3	5.00	8.40
4	7.50	10.90
5	10.00	13.40
6	12.50	15.90
7	15.00	18.40
8	17.50	20.90
9	20.00	23.40
10	22.50	25.90
11	25.00	28.40
12	27.50	30.90
13	30.00	33.40
14	32.50	35.90
15	35.00	38.40
16	37.50	40.90
17	40.00	43.40
18	42.50	45.90
19	45.00	48.40
20	47.50	50.90

**REVISION RECORD**

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

**TOLERANCE**

.0±0.25  
 0.00±0.15  
 0.000±0.05

**DRAW**

DESIGN  
 CHECK  
 APPROVE  
 VERSION

旭德

旭德

张春

张春

ZJT1

**SCALE**

1:1  
 UNIT  
 SIZE  
 SHEET  
 PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司  
 UNC Electronic & Technology Co., Ltd

PART NO.

B2513HR0-NP

DESCRITON

SCN2.0 90°Housing

DRAWING NO.

B2513.dwg