
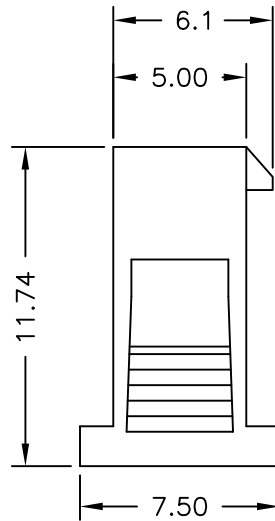
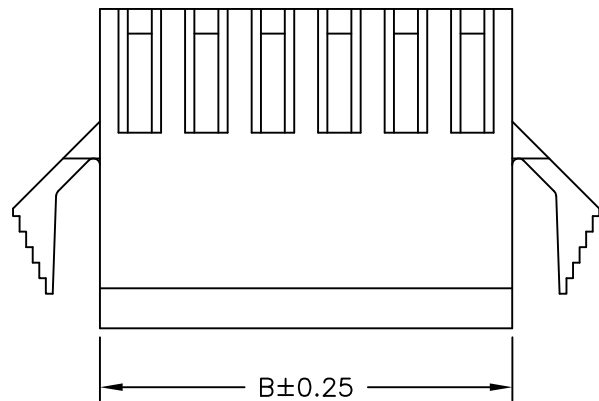
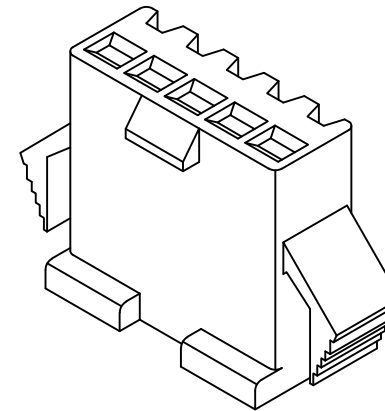


**SPECIFICATIONS**



Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2  
 Color: Black  
 Q'ty: 1000/Bag

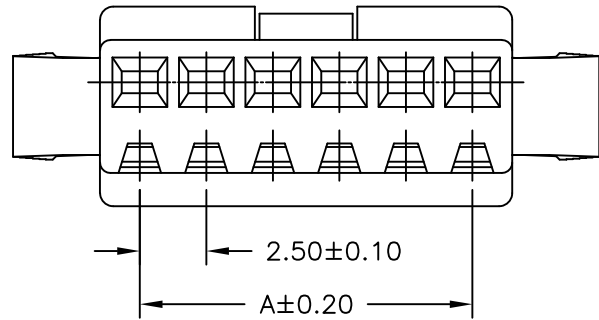

Circuits	Dimensions	
	A	B
2	2.50	5.50
3	5.00	8.00
4	7.50	10.50
5	10.00	13.00
6	12.50	15.50
7	15.00	18.00
8	17.50	20.50
9	20.00	23.00
10	22.50	25.50
11	25.00	28.00
12	27.50	30.50

**REVISION RECORD**

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE	DRAW	地德	SCALE	1:1	 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	
	DESIGN	地德	UNIT	mm		
	CHECK	吳奇春	SIZE	A4		
	APPROVE	吳奇春	SHEET	1/1		
	VERSION	TH1	PROJ.		PART NO.	C2522H02-NP
					DESCRITON	2.50mm PITCH
					DRAWING NO.	HOUSING-RECEPTACLE
TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn						