
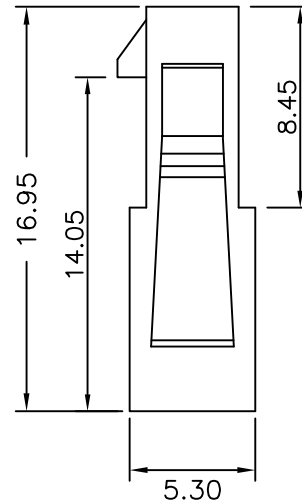
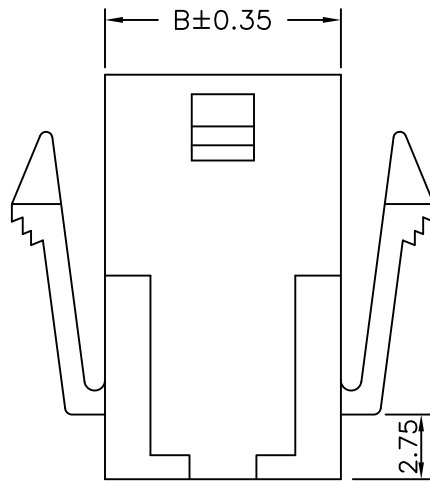
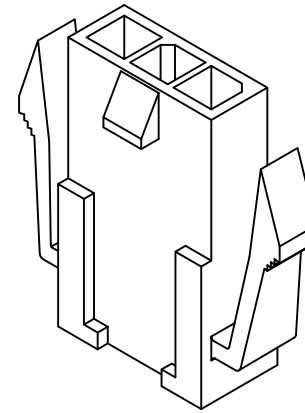


RoHS

SPECIFICATIONS

Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon66 UL 94-V2

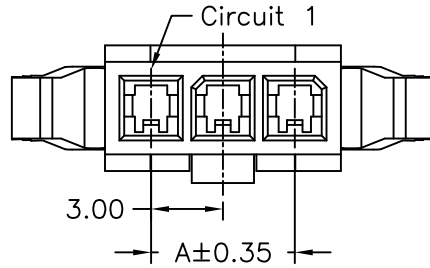

Circuits	Dimensions	
	A	B
1X02	3.00	7.00
1X03	6.00	10.00
1X04	9.00	13.00
1X05	12.00	16.00
1X06	15.00	19.00
1X07	18.00	22.00
1X08	21.00	25.00
1X09	24.00	28.00
1X10	27.00	31.00
1X11	30.00	34.00
1X12	33.00	37.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.30  
 0.00±0.20  
 0.000±0.10

DRAW

DESIGN  
 CHECK  
 APPROVE  
 VERSION

邓伟

邓伟

邓伟

ZL1

SCALE

1:1  
 UNIT  
 SIZE  
 SHEET  
 PROJ.

1:1

mm  
 A4  
 1/1



耀聯電子科技有限公司  
 UNC Electronic & Technology Co., Ltd

PART NO.

C3031H02-1xNP

DESCRITON

3.00mm PITCH  
 HOUSING-PLUG,  
 MICRO-FIT

DRAWING NO.

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn