
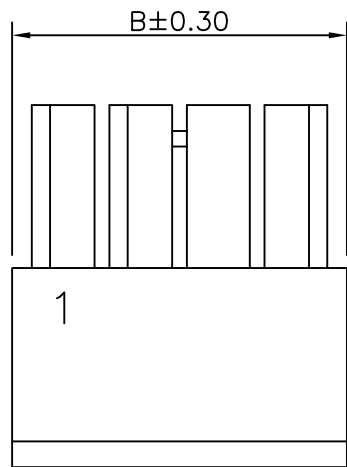

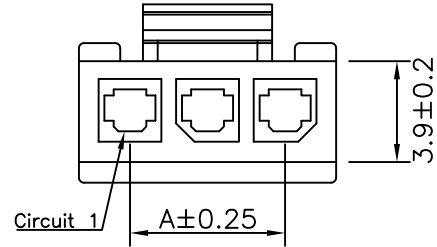



RoHS

SPECIFICATIONS


Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon66 UL 94-V2

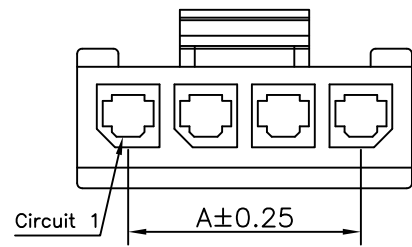



1X04P

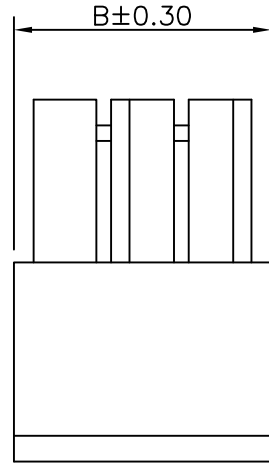

1X03P

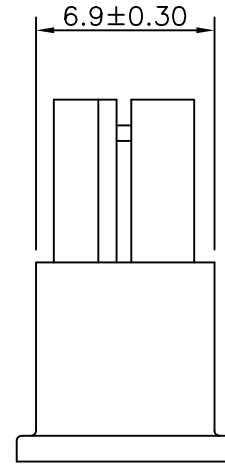

1X02P

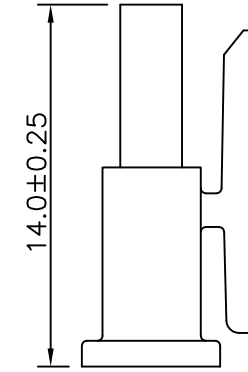

Circuits	Dimensions	
	A	B
1X02	--	6.90
1X03	6.00	9.90
1X04	9.00	13.00
1X05	12.00	15.90
1X06	15.00	19.00
1X07		
1X08	21.00	25.00
1X09		
1X10		
1X11		
1X12		

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0±0.30  
 0.00±0.20  
 0.000±0.10

DRAW

DESIGN  
 CHECK  
 APPROVE  
 VERSION

邓伟  
 邓伟  
 邓伟  
 ZL1

SCALE

1:1  
 UNIT  
 SIZE  
 SHEET  
 PROJ.

mm  
 A4  
 1/1



耀聯電子科技有限公司  
 UNC Electronic & Technology Co., Ltd

PART NO. C3032H02-1xNP  
 DESCRITON 3.00mm PITCH HOUSING-RECEPTACLE, MICRO-FIT  
 DRAWING NO.