
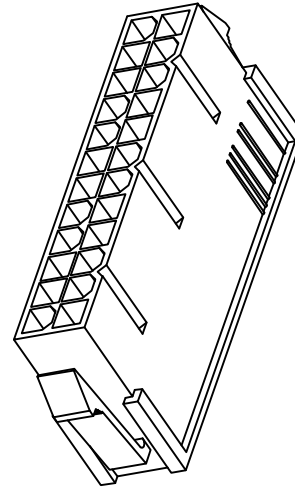


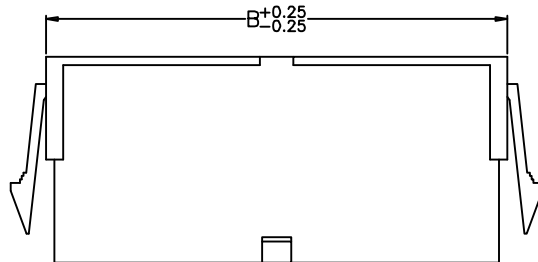
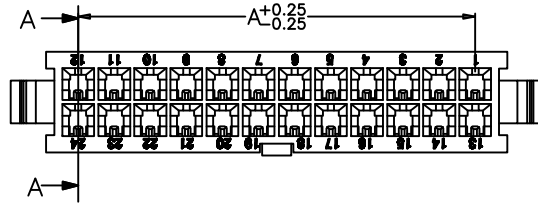



RoHS

SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2 or UL94V-0

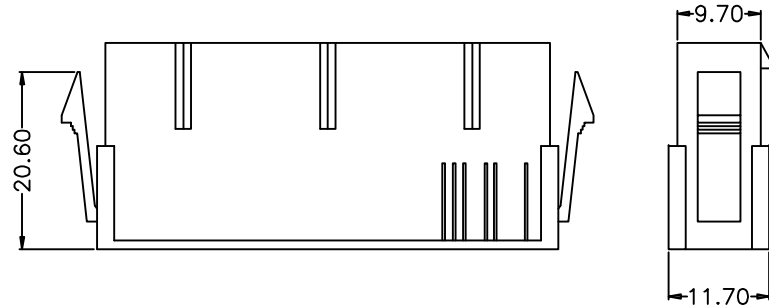

Circuits	Dimensions	
	A	B
2X01	--	7.50
2X02	4.20	11.70
2X03	8.40	15.90
2X04	12.60	20.10
2X05	16.80	24.30
2X06	21.00	28.50
2X07	25.20	32.70
2X08	29.40	36.90
2X09	33.60	41.10
2X10	37.80	45.30
2X11	42.00	49.50
2X12	46.20	53.70

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE
A	2012-8-10	New Model	BO	ZHU

TOLERANCE

.0±0.30
 0.00±0.25
 0.000±0.20

DRAW

DESIGN

CHECK

APPROVE

VERSION

邓伟

邓伟

邓伟

邓伟

ZL1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

PROJ.



耀聯電子科技有限公司
 UNC Electronic & Technology Co., Ltd

PART NO.

DESCRITON

DRAWING NO.

C4201H0x-2XNP-N

4.20mm PITCH
 HOUSING-PLUG,
 MINI-FIT

TEL:0769-87299998 FAX:0769-87299968 E-Mail:uniconn@163.com WEB:http://www.uniconn.cn