




REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A1			2021-6-15

SPECIFICATIONS:

1. Current Rating: 1A AC,DC
2. Voltage Rating: 125V AC,DC
3. Temperature Range: -25°C ~ +85°C
4. Contact Resistance: 20mΩ Max.
5. Insulation Resistance: 100MΩ Min.
6. Withstanding Voltage: 500V AC/minute
7. Material: HSG: Nylon66 94V-0
8. Color: Natural(White)

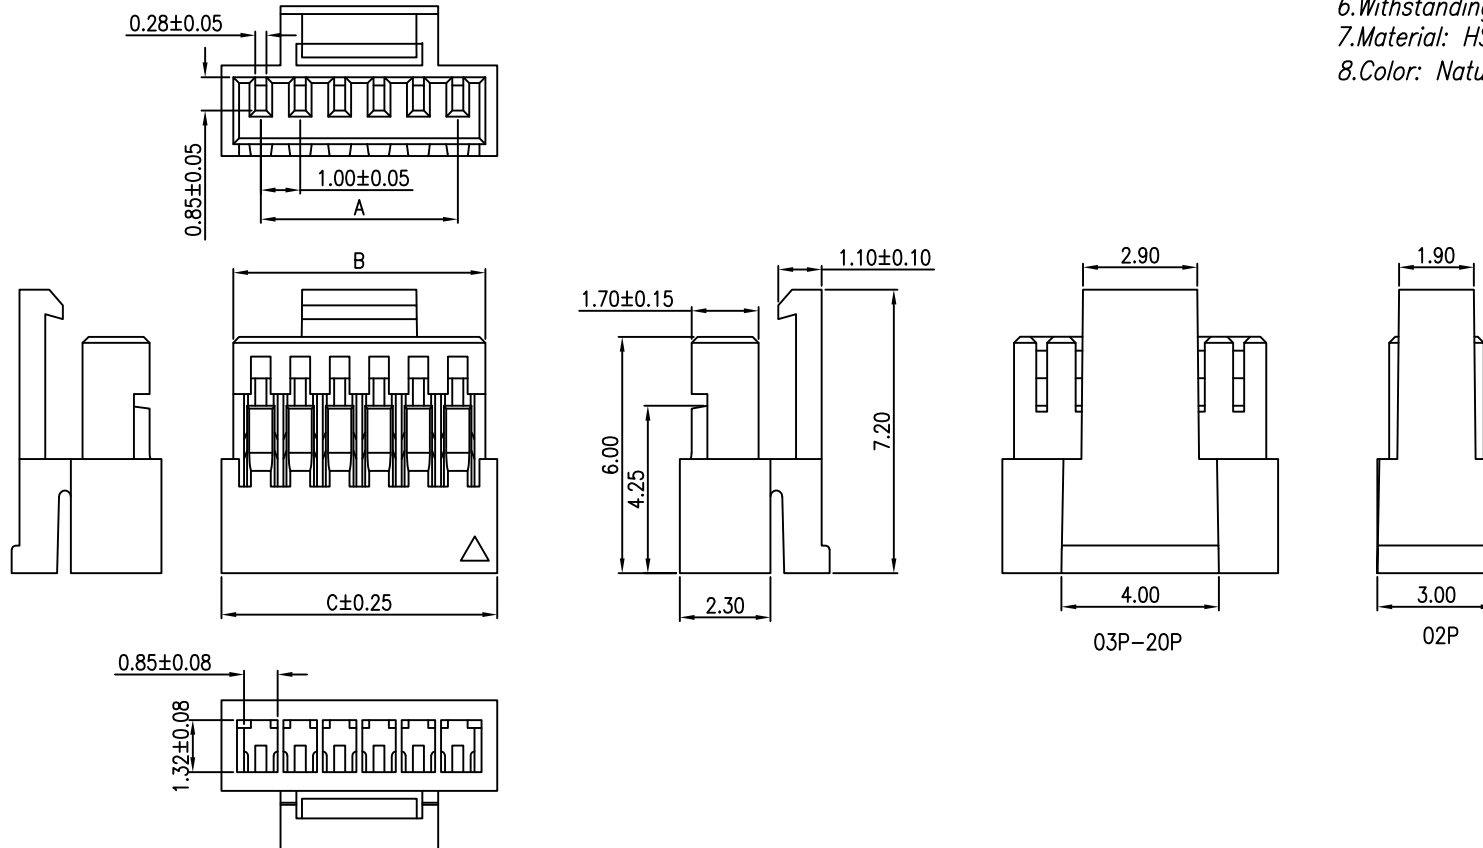

Circuits	Dimensions		
	A	B	C
2	1.00	2.40	3.00
3	2.00	3.40	4.00
4	3.00	4.40	5.00
5	4.00	5.40	6.00
6	5.00	6.40	7.00
7	6.00	7.40	8.00
8	7.00	8.40	9.00
9	8.00	9.40	10.00
10	9.00	10.40	11.00
11	10.00	11.40	12.00
12	11.00	12.40	13.00
13	12.00	13.40	14.00
14	13.00	14.40	15.00
15	14.00	15.40	16.00
16	15.00	16.40	17.00
17	16.00	17.40	18.00
18	17.00	18.40	19.00
19	18.00	19.40	20.00
20	19.00	20.40	21.00

TOLERANCE	DRAW	BO	SCALE	1:10	 耀聯電子科技有限公司 UNC Electronic & Technology Co., Ltd	PART NO.	A1005H00-NP-KB
	DESIGN	MA	UNIT	mm			DESCRIPTION
X :±0.3	CHECK	LIAN	SIZE	A4			
X.X :±0.2	APPROVE	LIAN	SHEET	1of1			
X.XX :0.15	VERSION	A1/XR	PROJ.				
X.XXX :0.10							

TEL:+86-769-87299998

WEB: <http://www.uniconn.cn>

MAIL: uniconn@163.com

Non-use Warranty for Level 1 Prohibited Substances In Product.

