
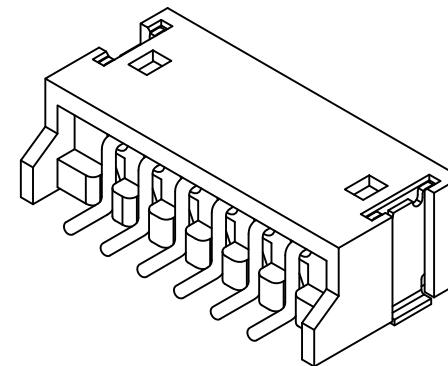
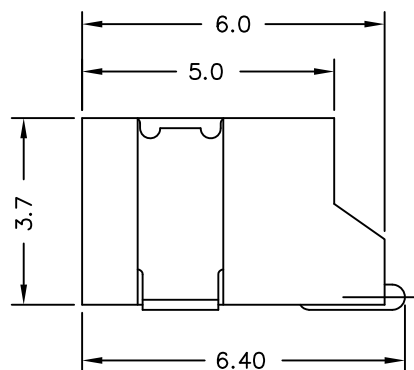
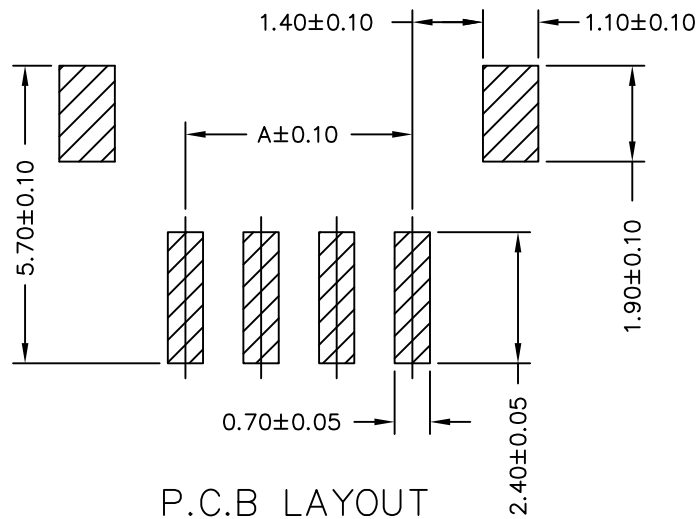
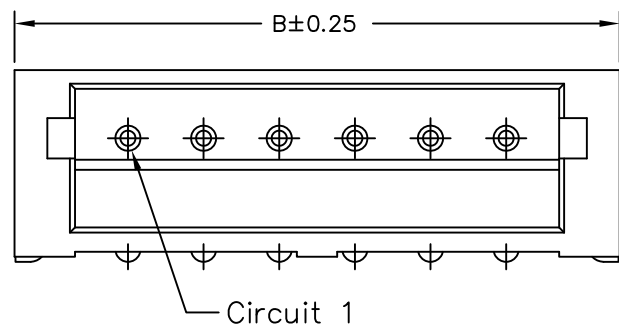


RoHS

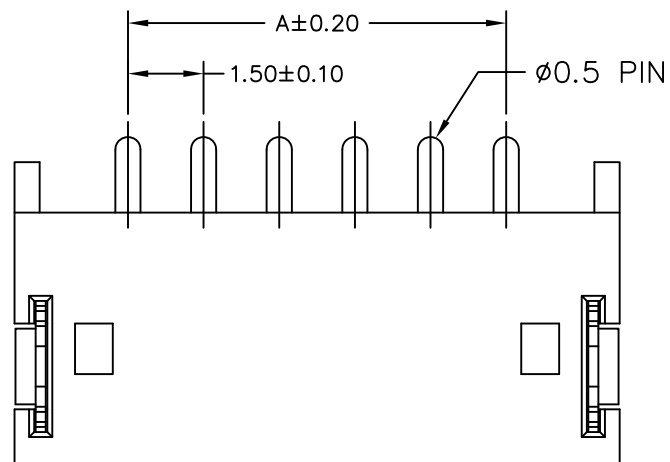

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Contact Resistance: 20m Ω Max.
Insulation Resistance: 500M Ω Min.
Withstanding Voltage: 500V AC/minute
Material: PIN: Brass/Tin-plated
Solder tab: Phos.Bronze/T.P.
HSG: Nylon 9T,UL94V-0
Color: Natural(White)

Circuits	Dimensions	
	A	B
2	1.50	6.00
3	3.00	7.50
4	4.50	9.00
5	6.00	10.50
6	7.50	12.00
7	9.00	13.50
8	10.50	15.00
9	12.00	16.50
10	13.50	18.00
11	15.00	19.50
12	16.50	21.00
13	18.00	22.50
14	19.50	24.00
15	21.00	25.50
16	22.50	27.00

REVISION RECORD

REV.	DATE	DESCRIPTION	CHANGE	APPROVE

TOLERANCE

.0 $\pm$ 0.25
0.00 $\pm$ 0.20
0.000 $\pm$ 0.15

DRAW

DESIGN
CHECK
APPROVE
VERSION

邓楠

邓楠

吴奇春

吴奇春

JD1

SCALE

UNIT

SIZE

SHEET

PROJ.

1:1

mm

A4

1/1

UNC

耀聯電子科技有限公司
UNC Electronic & Technology Co., Ltd

PART NO.

DESCRITON

DRAWING NO.

A1501WR0-S-NP

ZH1.5 90° Wafer

A1501.dwg

TEL: 0769-87299998 FAX: 0769-87299968 E-Mail: uniconn@163.com WEB: http://www.uniconn.cn